


Nylon Straight and 90° Grip-Seals®

- RoHS Compliant
- Liquid Tight Seal
- Strain Relief
- Corrosion Resistant
- Straight and 90° Configurations

Each Grip-Seal® package includes the grip-seal body, O-ring and locking nut. Our nylon friction ring provides uniform compression for a proper seal. It prevents bushing damage and results in a tight, uniform seal on the cord surface which seals out oil, chemicals and other contaminants.

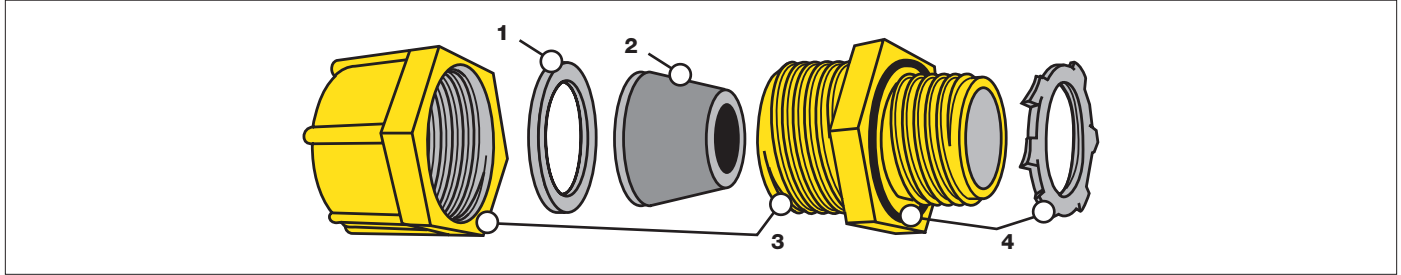

FEATURES & BENEFITS

1. NYLON FRICTION RING — Provides uniform compression for a proper seal. Prevents bushing damage and results in a tight, uniform seal on the cord surface.

2. MULTIPLE SYNTHETIC SEALING BUSHINGS INCLUDED WITH EACH PRODUCT — One part number covers a variety of cord diameters. Seals out water, oil, metal particles and other contaminants.

3. SECURITY YELLOW NYLON COMPRESSION NUT AND THREADED BODY — Resists impact and corrosion. Provides exceptional gripping strength. Easy to remove and reuse.

4. SEALING O-RING — Seals out oil, chemicals and other contaminants.

ORDERING INFORMATION (MINIMUM PURCHASE MAY BE REQUIRED IF PRODUCT NOT STOCKED)

PART NO.	CONFIGURATION	CORD DIAMETER RANGE	FITTING SIZE	NUMBER OF BUSHINGS
55505	Straight	0.180" – 0.430"	3/8" NPT	4
55513	Straight	0.188" – 0.500"	1/2" NPT	5
55516	Straight	0.188" – 0.625"	1/2" NPT	7
55535	Straight	0.250" – 0.375"	1/2" NPT	2
55515	Straight	0.312" – 0.625"	1/2" NPT	5
555180	Straight	0.562" – 0.688"	1/2" NPT	1
55530	Straight	0.560" – 0.750"	3/4" NPT	2
555340	Straight	0.562" – 0.688"	3/4" NPT	1
55592	90°	0.188" – 0.625"	1/2" NPT	7
555189	90°	0.562" – 0.688"	1/2" NPT	5
555349	90°	0.562" – 0.688"	3/4" NPT	1
55593	90°	0.562" – 0.750"	3/4" NPT	2