


Thermo-Trex® Chemical & Moisture Resistant Ultra-Sleeve with Closure

- Continuous Operating Temperature -51°C (-60°F) to 121°C (250°F)

The Thermo-Trex® Chemical & Moisture Resistant Ultra-Sleeve with Closure is constructed with a proprietary fabric that is resistant to puncture, tear, abrasion, water & petroleum. The reusable sleeve is intended for use to organize wires and cables and protect against tearing, cut-through and abrasion while offering excellent chemical and moisture resistance.

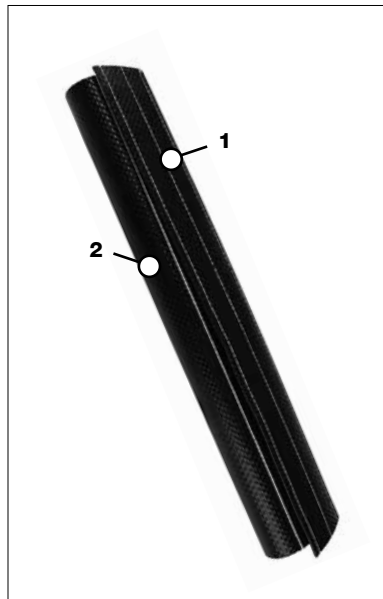

FEATURES & BENEFITS

- 1. EASY, CUT AND WRAP INSTALLATION** – Reduces downtime and eliminates the need to disassemble existing components to install.
- 2. ABRASION, CHEMICAL AND MOISTURE RESISTANT** – The sleeve is made from tightly woven ballistic Nylon® that sheds surface moisture and has a built-in aggressive, industrial strength hook and loop closure.

APPLICATIONS

- Cable Covers
- Cable Tray Protection
- Welding Cable Protection
- Hose Protection
- Anywhere Rubbing or Vibration Occurs
- Water, Grease & Hydraulic Oils Protection

CHEMICAL RESISTANCE CHART (1= No Effect 2= Little Effect 3= Affected 4= More Affected 5= Severely Affected)

Aromatic Solvents	1	De-Icing Fluid (MIL-A-8243)	1	Aliphatic Solvents	1	Strong Acids	1
Chlorinated Solvents	1	Strong Oxidants	1	Weak Bases	1	Esters/Keytones	1
Strong Bases	1	UV Light	1	Salt Water (O-S-1926)	1	Petroleum	1
Hydraulic Fluid (MIL-H-5606)	1	Fungus (ASTM G-21)	1	Lubricating Oil (MIL-A-8243)	1	Salts	1

ORDERING INFORMATION (MINIMUM PURCHASE MAY BE REQUIRED IF PRODUCT NOT STOCKED)

PART NO.	NOMINAL SIZE (IN)	WALL THICKNESS (IN)	HOOK & LOOP WIDTH (IN)	AVAILABLE COLORS	WT. (LBS) PER 100'
CMRW138	1.375	0.05	1.250	Black	19.6
CMRW300	3.00	0.05	1.250	Black	21.6