


Thermo-Trex® Reflective Fiberglass Ultra-Sleeve High Temperature Sleeving

- Continuous Temperatures up to 400°F (204°C)
- Intermittent Temperatures up to 1000°F (538°C)
- Excellent Moisture & Chemical Resistance
- RoHS Compliant

Reflective Fiberglass Ultra-Sleeve High Temperature Sleeving is a protective sleeve that is ideal for those areas where your cable runs through a particularly harsh environment of flash heat or flame, chemical or mechanical abuse. This Ultra-Sleeve offers great heat resistance and excellent moisture and chemical resistance.

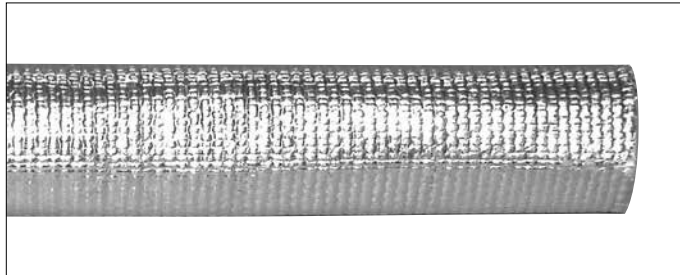

FEATURES & BENEFITS

- 1. FRAY RESISTANT DESIGN** — Will not unravel or fray when exposed to constant flexing or movement.
- 2. FINELY STRANDED AND WOVEN FIBERGLASS SLEEVE** — Superior high temperature resistance. Fine stranding means greater flexibility.
- 3. ALUMINIZED HEAT SEAL FILM** — Protects cables by providing a barrier to radiant heat. Fluid and chemical resistant. Extremely flexible.
- 4. AVAILABLE IN VARYING O.D.'S** — Allows you to buy the right size for the job. Larger sizes available through our Engineered Products Department.

ORDERING INFORMATION


(MINIMUM PURCHASE MAY BE REQUIRED IF PRODUCT NOT STOCKED)

REFLECTIVE FIBERGLASS	
PART NO.	INNER DIAMETER (IN)
49401	0.50
49402	0.75
49403	1.00
49404	1.50
49405	2.00
49406	2.50
49407	3.00
49408	3.50
49409	4.00

Thermo-Trex® Silicone Fiberglass Ultra-Sleeve High Temp. Sleeving with & without Hook & Loop Closure

- Extreme Temperatures up to 2000°F (1093°C)
- Continuous Temperature Range -65°F to 500°F (-54°C to 260°C)
- Excellent Moisture & Chemical Resistance
- RoHS Compliant

Silicone Fiberglass Ultra-Sleeve High Temperature Sleeving is a protective sleeve that is ideal for those areas where your cable runs through a particularly harsh environment of flash heat or flame, chemical or mechanical abuse. This Ultra-Sleeve offers heat resistance up to 500°F and excellent protection against moisture and chemicals.

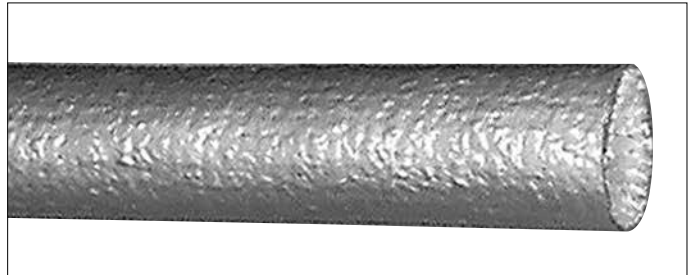

FEATURES & BENEFITS

- 1. FINELY STRANDED SPUN GLASS FIBERS** — Finer strands mean more flexibility. Higher density of glass fibers per square inch increases protection of cable.
- 2. EXTRA THICK SILICONE BARRIER** — Provides a first line defense against heat, abrasion and moisture.
- 3. SILICONE JACKET** — Offers excellent resistance to molten metal splash, radiant heat, chemicals and vibration.
- 4. AVAILABLE IN VARYING O.D.'S** — Allows you to buy the right size for the job. Protects most cable sizes.

ORDERING INFORMATION

(MINIMUM PURCHASE MAY BE REQUIRED IF PRODUCT NOT STOCKED)

SILICONE FIBERGLASS – SILVER JACKET			
PART NO.	INNER DIAMETER (IN)	PART NO.	INNER DIAMETER (IN)
49100	0.25	49103	1.50
49105	0.50	49104	2.00
49101	0.75	49107	3.00
49102	1.00	49109	4.00

SILICONE FIBERGLASS WITH HOOK & LOOP CLOSURE – RED JACKET			
PART NO.	INNER DIAMETER (IN)	PART NO.	INNER DIAMETER (IN)
49133	1.00	49142	2.50
49137	1.50	49144	3.00
49140	2.00	49148	4.00

Cable Glands & Strain Reliefs
Tubing & Wire Bundling
Sleeving
Tape/Wrap
Inventory Management
Tools