

DC 18 AWG 2-5 Pole & DC 22 AWG 8 pole Trex-Onics® Micro M12 Single Key Quick-Connects™ Receptacles



- RoHS Compliant

DC 18 AWG Female receptacles are available as back mount or panel mount. Male receptacles are available as panel mount or switch body mount. O-ring and locknut included; DC Micro closure caps with chain are sold separately.

APPLICATIONS



- Bar Code Readers
- Computer Interfaces
- Digital Remote Controls
- Encoders or Resolvers
- Heat Pressure and Flow Meters
- Instrumentation
- I/O (input/output) Devices
- Load Cell Monitors
- Programmable Controllers
- Programmable Limit Switches
- Proximity Switches
- Robotics
- Servo Motors
- Sensors and Relays
- Solenoid Valves
- Tachometers
- Telecommunications
- Torque-Tool Monitoring Equipment
- X-Ray Monitors
- Variable Speed Motors

ORDERING INFORMATION (MINIMUM PURCHASE MAY BE REQUIRED IF PRODUCT NOT STOCKED)

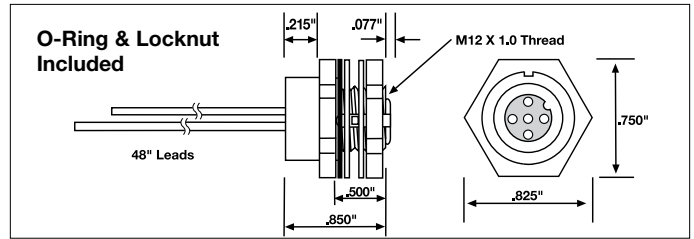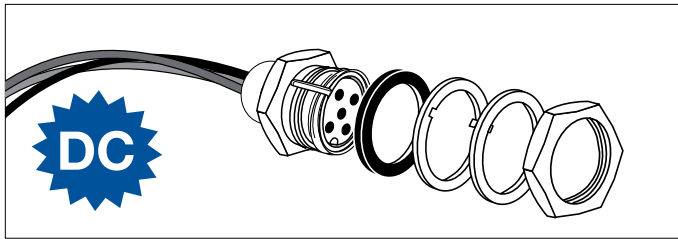

FEMALE RECEPTACLE — BACK MOUNT

PART NO.	PART NO.	DESCRIPTION	PIGTAIL LENGTH
63308	RF13Q24F004	3P Female Back Mount	48"
63408	RF14Q25F004	4P Female Back Mount	48"
63508	RF15Q26F004	5P Female Back Mount	48"

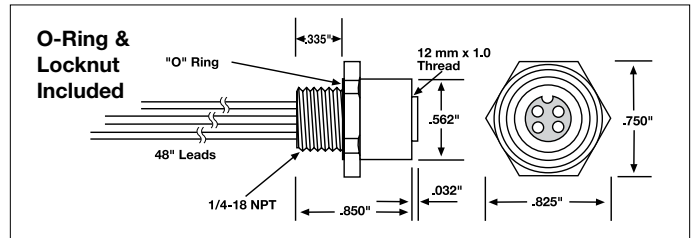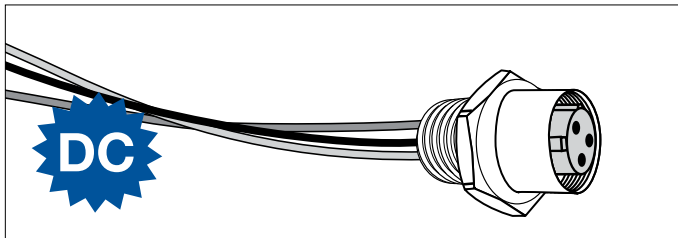



FEMALE RECEPTACLE — PANEL MOUNT

PART NO.	PART NO.	DESCRIPTION	PIGTAIL LENGTH
63202	—	2P Female Panel Mount	48"
63302	RF13T24F004	3P Female Panel Mount	48"
63402	RF14T25F004	4P Female Panel Mount	48"
63502	RF15T26F004	5P Female Panel Mount	48"
—	RF18T60M001	8P F Panel Mt. (Unshielded)	1 m
—	RF18T61M001	8P F Panel Mt. (Shielded)	1 m


DC 18 AWG 2-5 Pole & DC 22 AWG 8 pole Trex-Onics® Micro M12 Single Key Quick-Connects™ Receptacles (Continued)

DC MICRO CLOSURE CAPS WITH CHAIN

PART NO.	DESCRIPTION
64801	Closure Cap with 6" Chain for Male Plug & Receptacles with External Thread
64801S	Stainless Steel Closure Cap with 6" Chain for Male Plug & Receptacle with External Thread
64802	Closure Cap with 6" Chain for Female Plug & Receptacles with Internal Thread
64802S	Stainless Steel Closure Cap with 6" Chain for Female Plug & Receptacle with Internal Thread

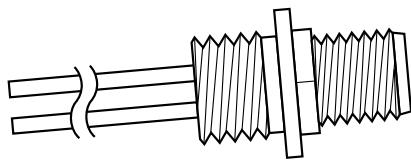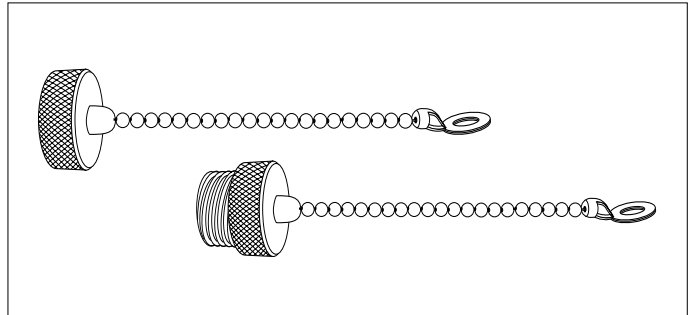

O-Ring & Locknut Included


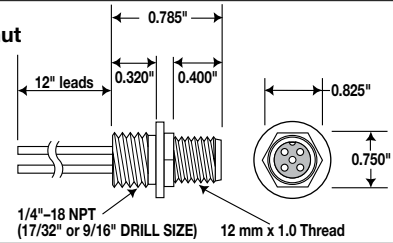


MALE RECEPTACLE – PANEL MOUNT

PART NO.	PART NO.	DESCRIPTION	PIGTAIL LENGTH
64202	—	2P Male Panel Mount	12"
64302	RF13R24F001	3P Male Panel Mount	12"
64402	RF14R25F001	4P Male Panel Mount	12"
64502	RF15R26F001	5P Male Panel Mount	12"
—	RF13R24F004	3P Male Panel Mount	48"
—	RF14R25F004	4P Male Panel Mount	48"
—	RF15R26F004	5P Male Panel Mount	48"
—	RF18R60M001	8P Male Panel Mt. (Unshielded)	1 m
—	RF18R61M001	8P Male Panel Mt. (Shielded)	1 m

DC 18 AWG 2-5 Pole & DC 22 AWG 8 pole Trex-Onics® Micro M12 Single Key Quick-Connects™ Receptacles (Continued)

ORDERING INFORMATION (MINIMUM PURCHASE MAY BE REQUIRED IF PRODUCT NOT STOCKED)

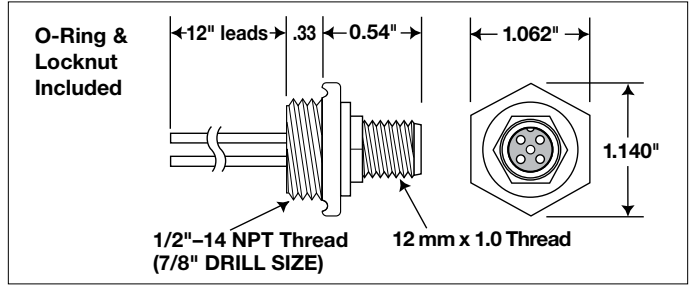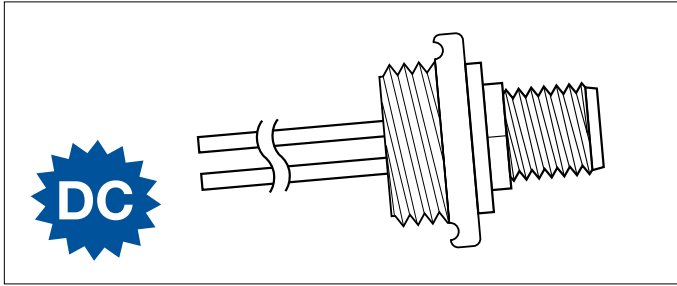

MALE RECEPTACLE — SWITCH BODY MOUNT			
PART NO.	PART NO.	DESCRIPTION	PIGTAIL LENGTH
64207	—	2P Male Switch Body	12"
64307	RF13S24F001	3P Male Switch Body	12"
64407	RF14S25F001	4P Male Switch Body	12"
64507	RF15S26F001	5P Male Switch Body	12"
—	RF13S24F004	3P Male Switch Body	48"
—	RF14S25F004	4P Male Switch Body	48"
—	RF15S26F004	5P Male Switch Body	48"

FACE VIEW OF FEMALE PLUGS

2 POLE	3 POLE	4 POLE	5 POLE	8 POLE
<ul style="list-style-type: none"> 1 Brown 2 Not Used 3 Blue 4 Not Used 5 Not Used 	<ul style="list-style-type: none"> 1 Brown 2 Not Used 3 Blue 4 Black 5 Not Used 	<ul style="list-style-type: none"> 1 Brown 2 White 3 Blue 4 Black 5 Not Used 	<ul style="list-style-type: none"> 1 Brown 2 White 3 Blue 4 Black 5 Gray 	<ul style="list-style-type: none"> 1 White 2 Brown 3 Green 4 Yellow 5 Gray 6 Pink 7 Blue 8 Red