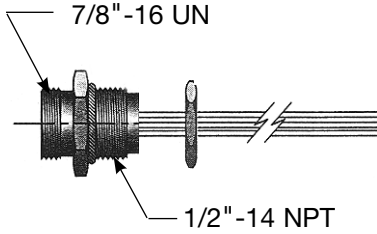
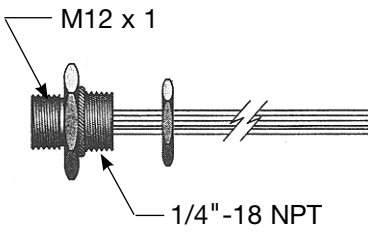
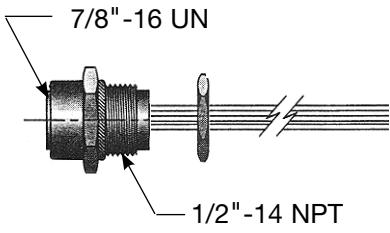
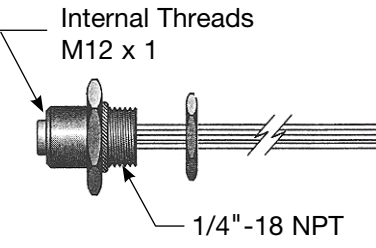




Trex-Onics® Flex-Net Receptacles for DeviceNet™ Applications

• RoHS Compliant

Flex-Net Receptacles for DeviceNet™ are designed to mate with DeviceNet™ compatible plug connectors and accessories. Available as male or female in both Mini and Micro sizes.

5 POLE MINI RECEPTACLES	5 POLE MICRO RECEPTACLES
<p style="text-align: center;">Mini Male</p>  <p style="text-align: center;">7/8" -16 UN 1/2" -14 NPT</p>	<p style="text-align: center;">Micro Male</p>  <p style="text-align: center;">M12 x 1 1/4" -18 NPT</p>
<p style="text-align: center;">Mini Female</p>  <p style="text-align: center;">7/8" -16 UN 1/2" -14 NPT</p>	<p style="text-align: center;">Micro Female</p>  <p style="text-align: center;">Internal Threads M12 x 1 1/4" -18 NPT</p>
<p style="text-align: center;">Face View of Female Mini Receptacle</p>  <ul style="list-style-type: none"> 1 Drain 2 Red (V+) 3 Black (V-) 4 White (Can-H) 5 Blue (Can-L) 	<p style="text-align: center;">Face View of Female Micro Receptacle</p>  <ul style="list-style-type: none"> 1 Drain 2 Red (V+) 3 Black (V-) 4 White (Can-H) 5 Blue (Can-L)

ORDERING INFORMATION (MINIMUM PURCHASE MAY BE REQUIRED IF PRODUCT NOT STOCKED)

PART NO.	DESCRIPTION	FEET	METERS
RP15A43F004	Male Receptacle — Mini	4.0	1.22
RP15C43F004	Female Receptacle — Mini	4.0	1.22
RT15R43F004	Male Receptacle — Micro	4.0	1.22
RT15T43F004	Female Receptacle — Micro	4.0	1.22

Portable Cords
 Power Cables (600 Volt to 35 kV)
 Welding Cables
 VFD/Servo Motor Cables
 Reeling Cables
 Control Cables/Instrumentation
 Bus Cables
 Flat Festoon Cables
 Retractable Coil Cables
 Chemical & Temp. Resistant Cables
 High Temperature Cables
 Igniter Cables
 Thermocouple Extension Wires
 Engineered Custom Cables